

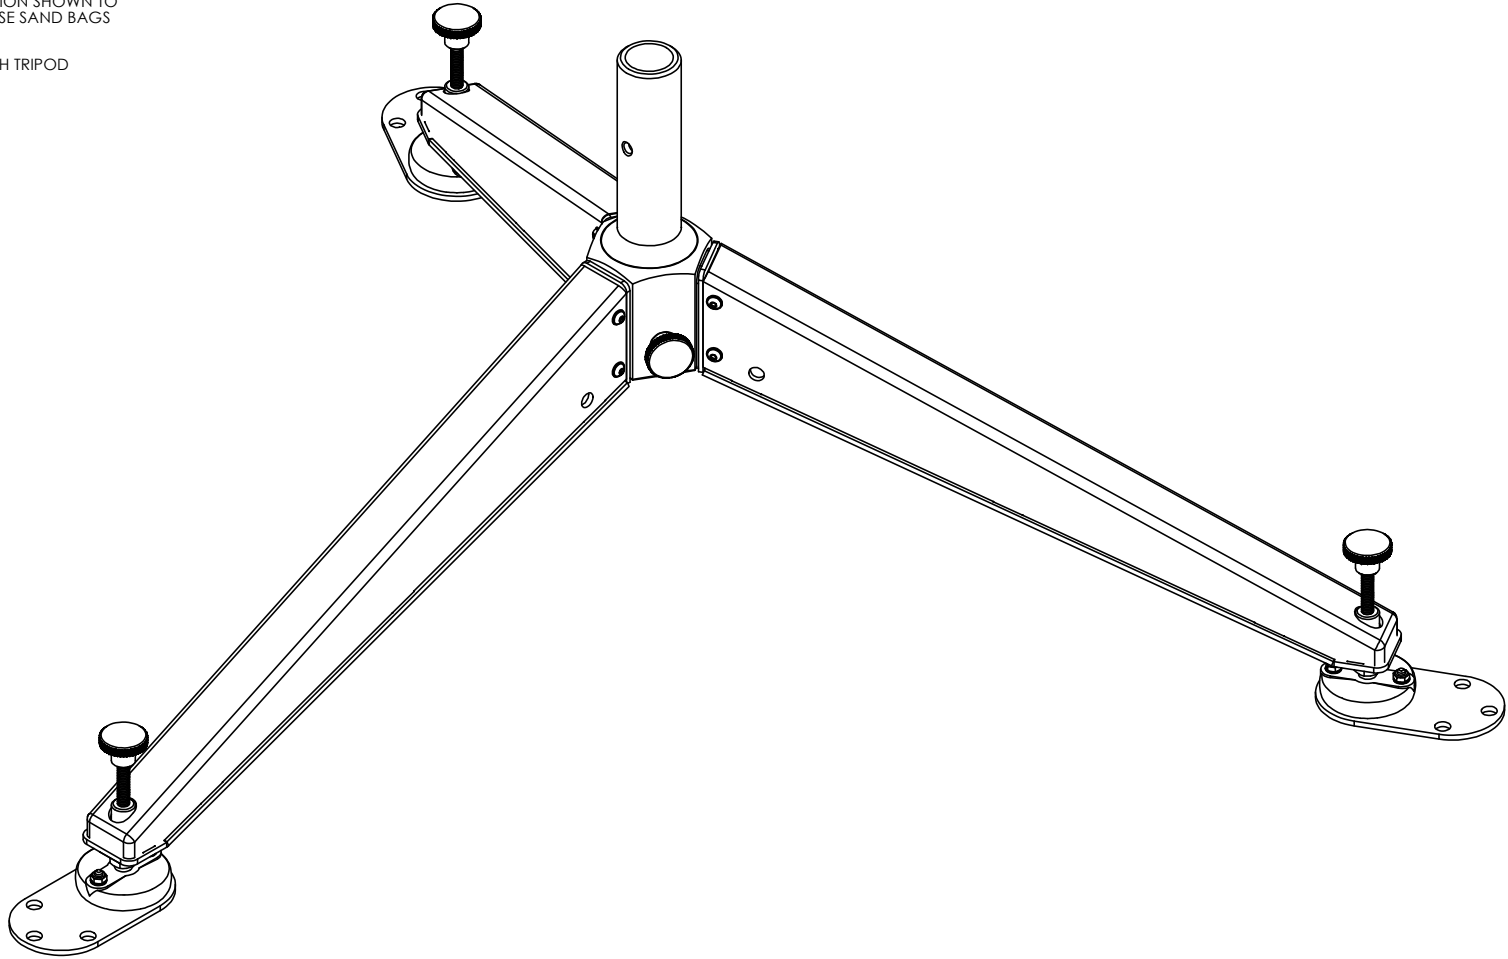


NOTES: UNLESS OTHERWISE SPECIFIED



1. TRIPOD INTERFACES DIRECTLY WITH ALL LINKALIGN POSITIONERS WITH 2 IN SOCKET. NO TOOLS REQUIRED
2. HARD COAT ANODIZE ALUMINUM CONSTRUCTION WITH STAINLESS STEEL HARDWARE
3. WEIGHT APPROXIMATELY 23 LBS
4. MAXIMUM PAYLOAD OF 200 LBS, INCLUDING POSITIONER
5. CENTER OF GRAVITY OF POSITIONER AND PAYLOAD MUST NOT EXCEED DIAMETER DIMENSION SHOWN TO PREVENT TIPPING. STAKE DOWN OR USE SAND BAGS ON TRIPOD LEGS TO ENSURE STABILITY
6. 1.6 INCHES OF ADJUSTABILITY AT EACH TRIPOD LEVELING LEG




SYMBOL KEY		UNLESS OTHERWISE SPECIFIED:		DRAWN	S. CHEYNE	2018-10-25	Q-PAR Antennas USA, LLC	
☐ NOTE	☐ PL ITEMS	DIMENSIONS ARE IN INCHES		CHECKED			TITLE: TRIPOD ASSEMBLY, HEAVY DUTY	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QPAR Antennas USA, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Q-PAR Antennas USA IS PROHIBITED.		TOLERANCES:		AME APPR.	S. CHEYNE	2018-10-25		
		ANGLE ± .5 DEGREES		EE APPR.				
		TWO PLACE DECIMAL ±.030						
		THREE PLACE DECIMAL ±.010						
		INTERPRET DIM AND TOL PER ASME Y14.5M - 1994						
		THIRD ANGLE PROJECTION		PART NO.			SIZE	DWG. NO.
				QACC-N900413-1			C	ICDN900413
		DO NOT SCALE DRAWING					SCALE: 1:3	
								REV
								A
								SHEET 1 OF 3

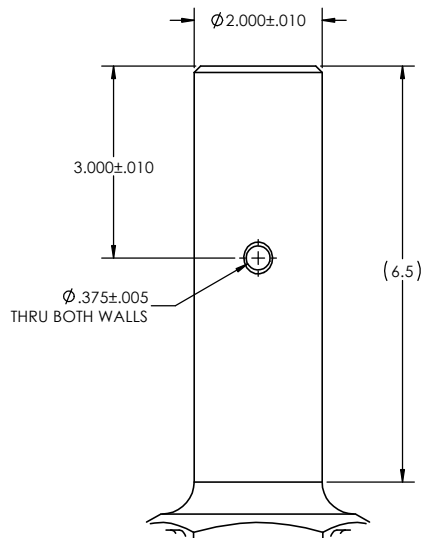

DETAIL C
SCALE 1 : 1.5

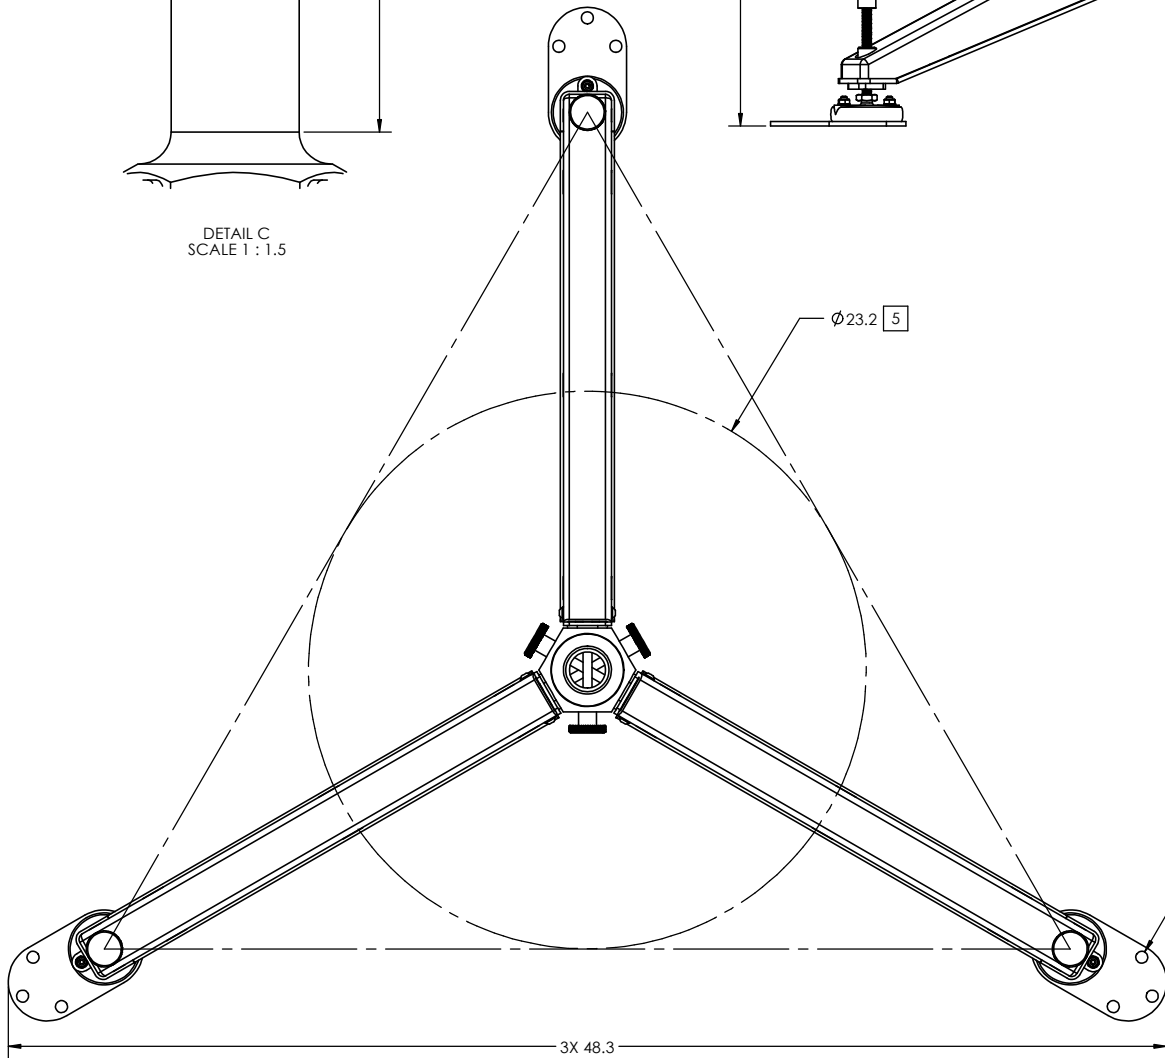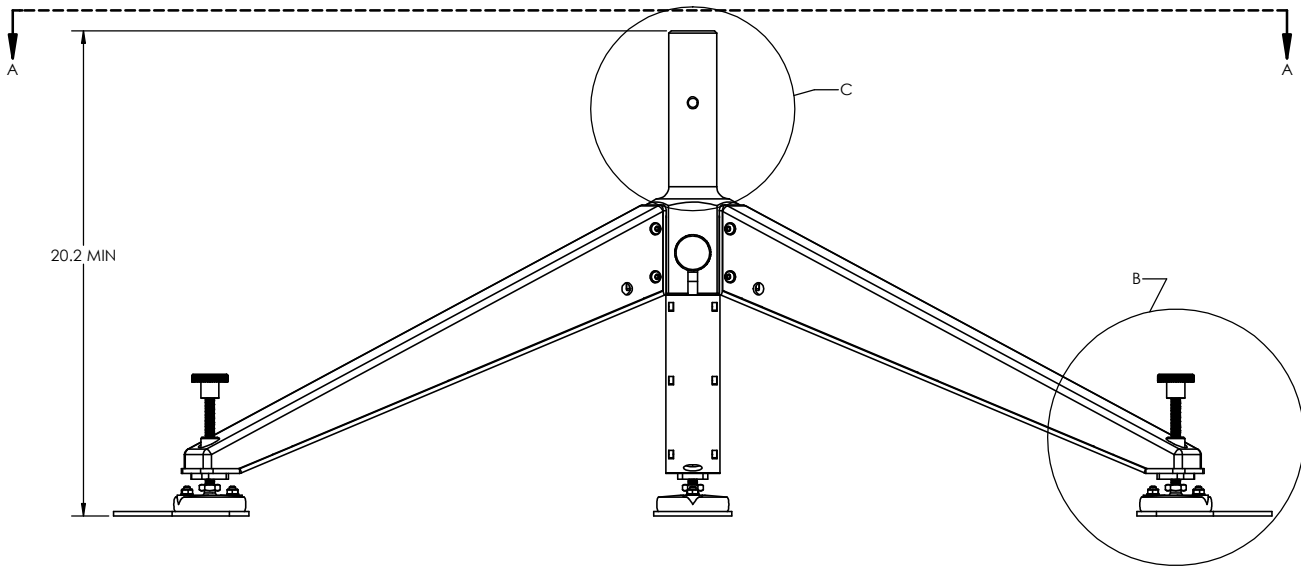

VIEW A-A

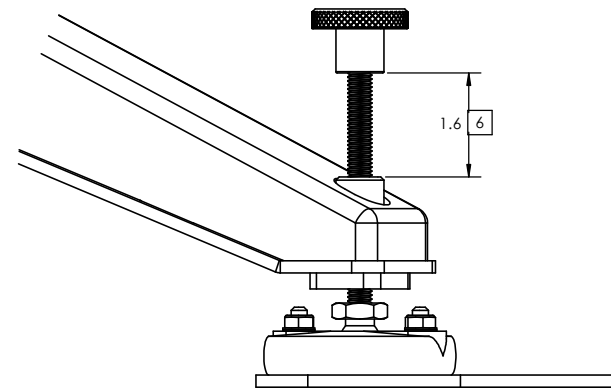

DETAIL B
SCALE 1 : 1.5
3 PLACES

